


Central Article Code: L02066C12-C  
 Local Code: EA640

Created: 24/02/2020  
 Modified: 01/09/2021

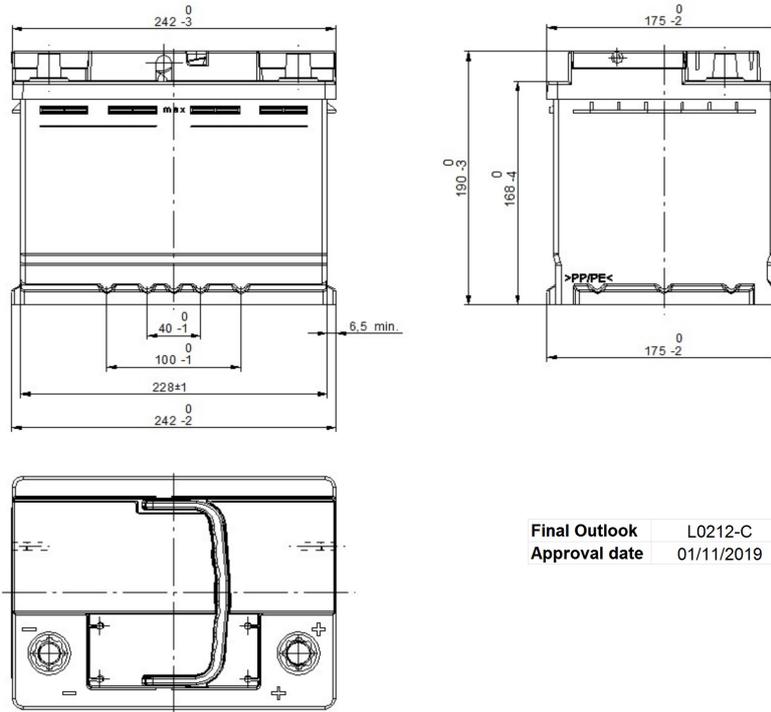

## PERFORMANCES

Voltage (V):	12 V
C20 (Ah):	64.0      20 h
Cranking (A):	640      EN
Charge:	WET
Technology:	Vented/Flooded
Grid:	Ca/Ca
Vibration:	V1 (30Hz+/-2Hz/3g/2h)
Endurance:	E2 (90 cycles@50%)

## STD. DIMENSIONS

Length (mm ± 2):	242
Width (mm ± 2):	175
Height (mm ± 2):	190
Total Weight (kg ± 5%):	14.90

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

## CONTAINER

Type:	L02      BLACK
Hold Down:	B13
H.D. Adapter:	No

## COVER

Type:	Double with Integrat	BLACK
Polarity:	ETN 0	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	No	
Ventilation:	Central	
Filter:	2 Filters	
Lateral Plug:	Standard    Left side    BLACK	shape

## PLUGS

Type:	1 x Vent Sealed PSL-OE ha	BLACK
-------	---------------------------	-------

## HANDLES

Type:	1 x PSL OE Integrated	BLACK
-------	-----------------------	-------

## OTHERS

Degassing Tube:	No
-----------------	----

C.O. from L02066C05-A (PSL-AM to PSL-OE)