


DISTRIBUTION CENTERS

USA • Europe • Asia Pacific

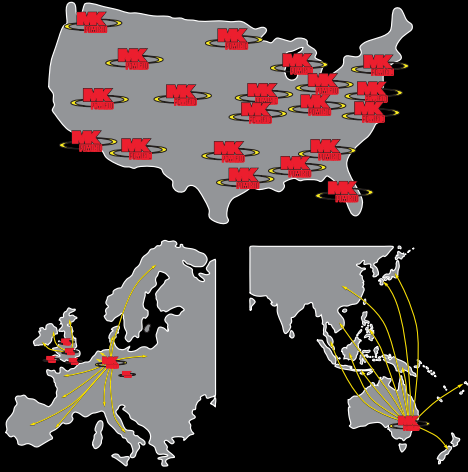

YOUR PARTNER IN POWER

MK Battery supplies only the highest quality batteries (gel, AGM and flooded deep cycle) that are specifically designed for our customers' many, varied applications including broadband communications, UPS (uninterruptible power supplies), power wheelchairs, telephony (valve-regulated stationary), solar, marine, electronics and powersports.

MK Battery ships fresh inventory fast, often within 24 hours, from a stock of more than 100,000 batteries in multiple distribution centers throughout the world and assists our customers with proper spent battery disposal through EPA permitted smelters.

Products

Service



Website: www.mkbattery.com • Email: sales@mkbattery.com
Toll Free 800-372-9253 • Tel 714-937-1033 • Fax 714-937-0818

All data subject to change without notice. No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company. ©2011 MK Battery

LIT-WSTC3002 08/11

Automatic Multi-Stage Chargers and Maintainers

OptiMate 4 Dual Program Dual Program Desulfation Circuits

- UltiMate tool for 12V battery care at home – Diagnoses, recovers, charges, tests and maintains your battery
- Sealed weatherproof enclosure with wall mounts and cables good down to -40 degrees
- Two different de-sulfation programs for effective recovery of neglected batteries
- Pre-qualification test indicates battery condition before charging
- Alternating test and charge maintenance program makes it 100% safe for long term maintenance charging
- Designed to connect to any BMW motorcycle original 12 volt socket, including those with CANbus
- Comes with both alligator clips as well as a weatherproof eyelet connector

Part Number: LS12/0.8

Applications

Designed for charging and maintaining motorcycle, watercraft, ATV, and smaller battery types including gel, agm, and conventional wet from 2 ah to 45 ah.

AccuMate Battery Charger 6 and 12 Volt Capability

- Fully automatic 4 stage smartcharger for 6V and 12V lead-acid batteries
- 1.2 Amps of constant current delivered right up to final stage for quick charging
- Ideal for use with both starter and deep cycle/standby batteries
- Good for long-term storage and will prevent sulfation as long as battery is connected

Part Number: LS6/1.2

Applications

Designed for charging and maintaining motorcycle, watercraft, ATV, and smaller battery types from 4 ah. Also designed to maintain automotive batteries, including older antique vehicles that may have 6 volt electrical systems.

OptiMate 3+ Battery Charger Unique Desulfation Circuit

- 5 stage program features constant current and constant voltage charging
- Desulfation circuit recovers deeply discharged and sulfated batteries
- Designed to be left on indefinitely without worry of overcharging

Part Number: LS12/0.6

Applications

Designed for charging and maintaining motorcycle, watercraft, ATV, and smaller battery types including gel, agm, and conventional wet from 4 ah to 32 ah.

Model	Description
LS6/1.2	Automatic 6 and 12 volt 1.25 amp charger / maintainer
LS12/0.6	Automatic 12 volt 0.6 amp charger / maintainer with desulfation circuit
LS12/0.8	Dual Program Automatic 12 volt 0.8 amp charger / maintainer with desulfation circuit
LS12/1.2 RING	Ring accessory with quick disconnect
LS12/1.2 PLUG SAE	Plug accessory for DIN 12 volt sockets such as on BMW and Triumph motorcycles
LS12/1.2 BRACKET	Mounting bracket for both Accumates and Optimates



Sealed AGM Powersport Batteries





WESTCO PLATINUM SERIES

WHEN ONLY THE BEST WILL DO

All the benefits of our Classic Absorbed Glass Mat (AGM) batteries plus:

- Superior CCA performance for more cranking power when you need it
- Built to stringent quality control standards to ensure longest life
- Engineered to perform in the harshest applications
- Extended shelf life
- Higher vibration resistance
- Advanced AGM Technology
- Better reliability over time
- Made in U.S.A.



FACTORY SEALED, VALVE-REGULATED, MAINTENANCE-FREE DESIGN


UNIQUE, LEAKPROOF PRESSURIZED VENT SYSTEM ENGINEERED FOR SAFETY AND LONG LIFE

LARGER THROUGH-PARTITION WELDS INCREASE POWER OUTPUT, INCREASES DURABILITY

HEAVY-DUTY POSTS WITH STAINLESS STEEL INSERT

TEAR-RESISTANT ABSORBED GLASS MAT SEPARATORS

STAINLESS STEEL HARDWARE

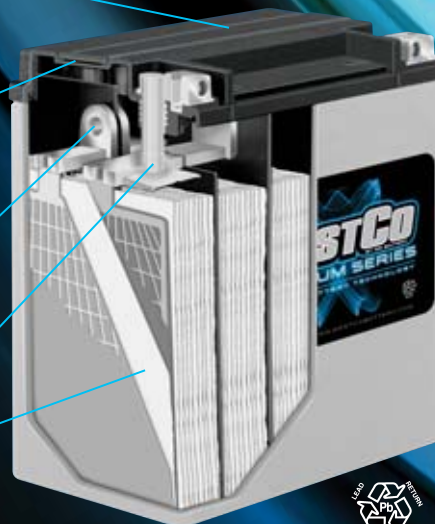

WESTCO POWERSPORT SERIES CLASSIC AGM BATTERIES

Setting the standard for over 15 years, WestCo's Classic AGM batteries deliver value and reliability to modern powersports enthusiasts.



- Competitively priced
- Spill proof & leak resistant design
- Vibration resistant
- Covers most popular models
- UPS shippable, non hazardous
- Low self discharge

Specifications				Cross Reference	Dimensions – Inches (mm)			Polarity	
MODEL	VOLT	AH	CCA		L	W	H		
12VX4L-B	12	4	45	YT4L-BS	4 7/16 (113)	2 3/4 (70)	3 1/2 (88)	-	+
12VX5L-B	12	5	70	YTX5L-BS	4 7/16 (113)	2 3/4 (70)	4 1/4 (107)	-	+
12V7L-B	12	7	85	YTX7L-BS	4 7/16 (113)	2 3/4 (70)	5 3/16 (132)	-	+
12V7B-B	12	7	85	YT7B-BS	5 7/8 (150)	2 3/16 (66)	3 3/8 (92)	+	-
12V7A-BS	12	7	90	YTX7A-BS	5 7/8 (150)	3 7/16 (87)	3 3/4 (95)	+	-
12VZ7S	12	7	130	YTZ7S	4 7/16 (113)	2 3/4 (70)	4 3/16 (106)	-	+
12V9B-4	12	8	115	YT9B-4	5 7/8 (150)	2 11/16 (69)	4 1/8 (105)	+	-
12V9-B	12	9	120	YTX9-BS	5 7/8 (150)	3 7/16 (87)	4 1/8 (105)	+	-
12VZ10S	12	9	190	YTZ10S	5 15/16 (151)	3 7/16 (87)	3 3/8 (92)	+	-
12V12B-4	12	10	125	YT12B-BS	5 7/8 (150)	2 11/16 (69)	5 1/8 (130)	+	-
12V12-B	12	12	180	YTX12-BS	5 7/8 (150)	3 7/16 (88)	5 1/8 (130)	+	-
12V12A-BS	12	10	175	YT12A-BS/YTZ12S	5 15/16 (151)	3 7/16 (87)	4 3/16 (106)	+	-
12V14B-4	12	12	135	YT14B-4	5 7/8 (150)	2 11/16 (69)	5 3/8 (144)	+	-
12V13L	12	13	200	PC545/YTX15L-BS	6 7/8 (175)	3 7/16 (87)	5 1/8 (130)	-	+
12V14-B	12	14	200	YTX14-BS	5 7/8 (150)	3 7/16 (87)	5 3/4 (148)	+	-
12V14L-B	12	14	200	YB14L-A2/YTX14AHL-BS	5 1/4 (134)	3 1/2 (89)	6 1/2 (166)	-	+
12V14-A2	12	14	210	YB14-A2, YB14-B2, YTX14AH-BS	5 1/4 (134)	3 1/2 (89)	6 1/2 (166)	+	-
12V16-B	12	14	230	YTX16-BS1	5 7/8 (150)	3 7/16 (88)	6 3/8 (162)	+	-
12V16-A2	12	14	230	YTX16-BS	5 7/8 (150)	3 7/16 (88)	6 3/8 (162)	+	-
12V16CLB	12	19	260	YB16CL-B/YTX20HL-PW	6 7/8 (175)	3 15/16 (101)	6 13/16 (174)	-	+
12V20P	12	20	275	BMW 19A.H./51913, 51814	7 (178)	3 (76)	6 1/2 (165)	-	+
12V20	12	18	300	YTX20-BS	6 7/8 (175)	3 7/16 (87)	6 1/16 (154)	+	-
12V20L	12	18	300	YTX20L-BS/YTX20HL-BS	6 7/8 (175)	3 7/16 (87)	6 1/16 (154)	-	+
12V22	12	22	300	Y50-N18L-A/A3/YTX24HL	8 1/16 (205)	3 3/16 (90)	6 3/8 (162)	-	+
12V30	12	30	350	BMW 25 A.H./53030	6 1/2 (165)	4 7/8 (124)	6 7/8 (175)	-	+
12VX30L-B	12	30	350	YIX30L-BS	6 1/2 (166)	4 15/16 (125)	6 7/8 (175)	-	+
6V13	6	13	N/A	BMW	4 5/16 (109)	2 3/4 (70)	5 1/2 (140)	-	+

* Shipped with height adapter for certain applications. \$ 10 AH rating.

ADVANCED AGM

CLASSIC AGM