
RANGE SUMMARY

The PowerSafe™ SBS battery range utilizes unique and proven technology to provide a superior range of valve regulated batteries with an extended service life in compact and energy dense configurations. PowerSafe SBS batteries are manufactured to the highest international standards and are ideal for reliable use in all wireless and fixed-line communication applications. PowerSafe SBS batteries are also widely used in cable TV, emergency lighting, power generation and offshore applications.

PowerSafe SBS top terminal batteries are available in capacities of 7Ah to 361Ah and in 2, 6 and 12V blocs. Smaller than competitive products, and in unique SBS and JIS footprints, SBS products are suitable for a wide range of telecom and reserve power applications especially where space is limited.

PowerSafe SBS batteries are designed to cope with elevated temperatures and harsh environments. The advanced thin plate, pure lead technology and unique manufacturing methods, used by EnerSys®, make PowerSafe SBS batteries the choice for long and trouble-free service. The maximum operating temperature of the PowerSafe SBS J series battery can be extended to 176°F (80°C) via an optional metal jacket.

Features & Benefits

- Capacity range: 7Ah - 361Ah
- Proven long service
- High energy density
- Up to two year shelf life
- Very low ventilation requirement
- 2V, 6V, and 12V configurations
- Wide operating temperature range:
-40°F (-40°C) to 122°F (50°C)



Construction

- Positive plate - pure lead grid using a unique manufacturing process (SBS J products are low percentage tin)
- Negative plates - provide perfect balance with the positive plates to ensure optimum recombination efficiency
- Separator - superior quality microporous glass mat separator with high absorption and stability
- Container and lids - UL94 V0 rated flame retardant material, highly resistant to shock and vibration (J types are PPO resin, all other types are ABS)
- Terminal design - leak resistant patented dual seal terminal design

Operation

- Recommended float charge voltage: 2.29Vpc @ 68°F (20°C) or 2.27Vpc @ 77°F (25°C)
- The PowerSafe™ SBS range of batteries can be mounted in any orientation except inverted
- PowerSafe SBS batteries are designed for use in cabinets, or on stands, close to the point of use. A separate battery room is not required
- PowerSafe SBS batteries are ideal for installation as an integral part of a standby system due to its long life
- Several Powersafe SBS battery types are available for underwater applications

Standards

- Fully compliant with BS 6290 Part 4 (1997)
- Conforms to IEC 60896-21 and Telcordia SR-4228
- Recognized by UL (UL Standard 1989)
- Approved as non-hazardous cargo for ground, sea and air transportation in accordance with US DOT Regulation 49 and ICAO & IATA Packing Instruction 806
- Manufactured in EnerSys® production facilities certified to ISO 9001:2000 and ISO 14001:2004
- NEBS Certified




General Specifications

Type	Number of Cells	Nominal Voltage (V)	Nominal Capacity (Ah)		Nominal Dimensions						Typical Weight		Short Circuit Current (A) ⁽²⁾	Internal Resistance (mΩ) ⁽²⁾	Terminals
			10 hr rate to 1.80Vpc @ 20°C	8 hr rate to 1.75Vpc @ 77°F	Length mm	in	Width mm	in	Height mm	in	kg	lbs			
SBS 8	6	12	7	7	138	5.4	86	3.4	101	4.0	2.7	5.9	455	27.1	M4 F
SBS 15	6	12	14	14	200	7.9	77	3.0	140	5.5	5.7	12.5	891	13.5	M6 M
SBS 30	6	12	26	26	250	9.8	97	3.8	156	6.1	9.5	20.9	1556	7.9	M6 M
SBS HB30 ⁽¹⁾	6	12	26	26	250	9.8	97	3.8	156	6.1	9.6	21.1	1556	7.9	harness
SBS 40	6	12	38	38	250	9.8	97	3.8	206	8.1	12.7	28.0	2184	5.6	M6 M
SBS 60	6	12	51	51	220	8.7	121	4.8	261	10.3	18.5	40.7	2618	4.4	M6 M
SBS 110	3	6	115	116	200	7.9	208	8.2	239	9.4	21.2	46.6	3804	1.7	M8 M
SBS 130	3	6	132	133	200	7.9	208	8.2	239	9.4	22.7	49.9	4111	1.4	M8 M
SBS 300	1	2	310	307	200	7.9	208	8.2	239	9.4	21.7	47.7	8700	0.23	M8 M
SBS 390	1	2	360	361	200	7.9	208	8.2	239	9.4	23.2	51.0	11101	0.18	M8 M
SBS J13	6	12	12	12	175	6.9	84	3.3	129	5.1	5.7	12.6	957	13.0	M6 F
SBS J16	6	12	15	15	181	7.1	76	3.0	167	6.6	6.7	14.8	1111	11.0	M6 F
SBS J30	6	12	26	26	166	6.5	175	6.9	125	4.9	11.8	26.0	1766	7.0	M6 F
SBS J40	6	12	39	39	196	7.7	165	6.5	170	6.7	17.4	38.2	2400	5.2	M6 F
SBS J70	6	12	64	64	329	12.9	166	6.5	174	6.9	27.6	60.9	3500	3.5	M6 F
SBS B8	6	12	31	31	280	11.0	97	3.8	159	6.3	10.3	22.7	1584	7.7	M8 F
SBS B10	6	12	38	38	280	11.0	97	3.8	184	7.2	12.8	28.2	1968	6.2	M8 F
SBS B14	6	12	62	62	280	11.0	97	3.8	264	10.4	19.1	42.0	3210	3.8	M8 F
SBS C11	6	12	92	91	395	15.6	105	4.1	264	10.4	28.0	61.6	3696	3.3	M8 F
SBS 145	6	12	145	145	429	16.9	173	6.8	238	9.4	47.6	105	4100	3.0	M8 F

Notes

⁽¹⁾ SBS HB30 is fitted with a 21"/533mm harness that terminates in a 2-pin polarized plug-in connector which is compatible with embedded power SLC systems.

⁽²⁾ Figures obtained via BS6290 method.

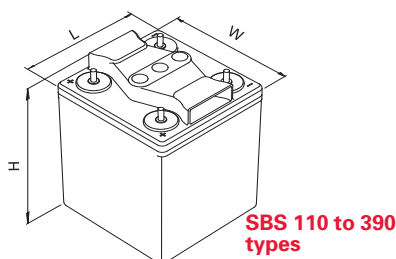

www.enersys.com

EnerSys
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel: +1-610-208-1991
+1-800-538-3627
Fax: +1-610-372-8613

EnerSys Europe
Zurich, Switzerland
Tel: +41 (0)44 215 74 10

EnerSys Asia
Guangdong, China
Tel: +86-755-2689 3639

Distributed by:

Printed in USA
© 2007 EnerSys. All rights reserved.
Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted.