

ZGL120092

Zenith



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 200Ah
	5h 170Ah
Internal Resistance	Full Charged Battery 25°C ≤3mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 85%
	-15° 65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge (Costant Voltage 25°C)	Float Volt 13.6 - 13.8V
	Charge Max.55Amp. 14.4 - 14.9 Volt

CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
530	209	215	219
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
-	-	-	
Weight / Peso		52Kg	
Terminal / Terminali		M8	
Case / Contenitore		ABS	

Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	1,5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	670	447	360	219	158	128	80,4	73,3	53,3	38,6	35,7	28,5	23,5	19,8	10,4
1.65V	649	443	349	215	156	127	79,6	73,0	52,7	38,2	35,3	28,2	23,3	19,6	10,4
1.70V	623	440	341	211	155	126	78,9	72,4	52,0	37,8	35,0	27,9	23,1	19,4	10,3
1.75V	573	433	331	210	153	124	78,0	71,3	51,4	37,4	34,7	27,6	22,9	19,2	10,3
1.80V	514	423	308	200	149	122	77,2	70,0	51,0	33,7	33,7	27,4	22,7	19,0	10,2


Watts (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	1,5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	1122	756	634	396	291	242	161	139	102	76,0	67,7	55,8	45,6	38,0	20,5
1.65V	1079	750	622	392	289	240	159	139	100	75,2	67,5	55,2	45,2	37,6	20,4
1.70V	1074	744	615	392	286	238	157	138	100	74,5	66,9	54,6	45,0	37,2	20,3
1.75V	1001	738	611	390	284	237	156	137	98,8	73,7	66,5	54,1	44,7	36,9	20,2
1.80V	920	732	578	381	281	235	154	137	98,8	73,0	65,7	53,5	44,3	36,5	20,1


This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




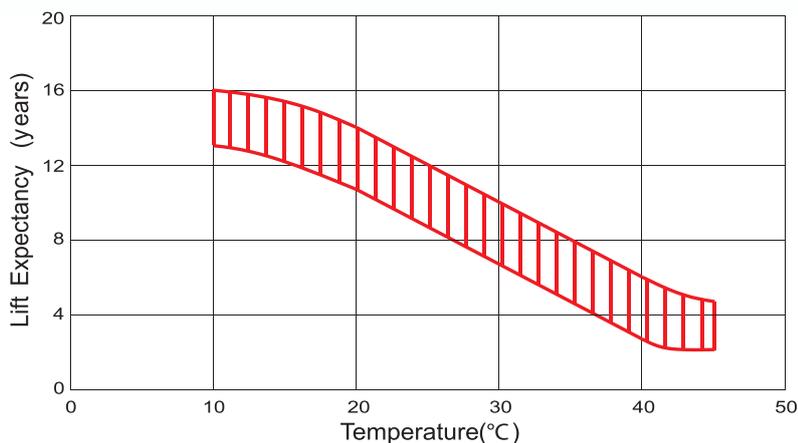


Charging characteristics

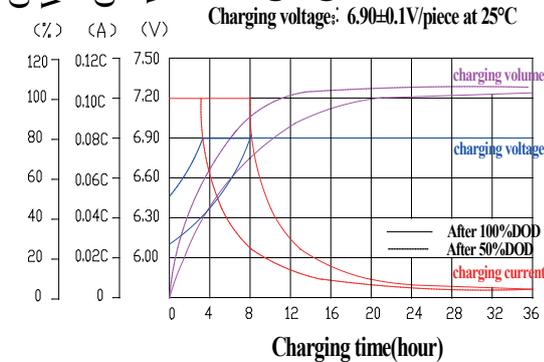

Temperature effect on battery self-discharge

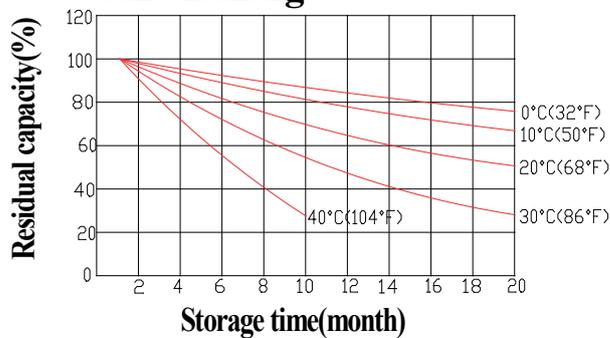

Discharge characteristics (25°C)

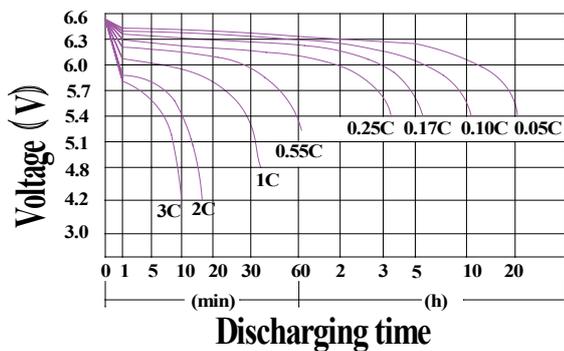

Temperature effect on capacity

