
TAB Motion Pasted

85 P



Physical Dimension

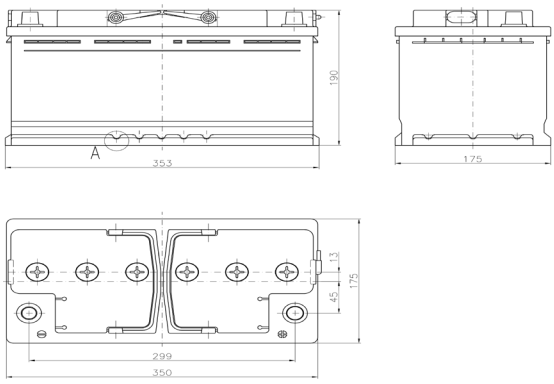

Benefits

- Exceptional Vibration Resistance – Built to endure tough conditions
- High Discharge Capability – Delivers power when you need it most
- Reliable Performance – Ideal for demanding environments
- Economical & Long-Lasting – A cost-effective power solution

Application

- Wheelchairs
- Trucks
- Caravans and mobile homes
- Battery driven carts
- Boats
- Cleaning machines
- Solar systems

Standards

- IEC/EN 60254-1


Specification


Technology	
Battery Type	Flooded
Plate Type (poz/neg)	Expanded/Casted
Grid Alloy (poz/neg)	Ca/Ca
Separator	PE
Dimensions (mm) - LxWxH	353x175x190
Weight (kg)	24,6
Box Type / BHD	L5/B13
Cover Type	Kamina
Box/Cover/Plugs Colour	Black/Black/Red
Layout	0
Terminal	1
Plugs Type	M18

Performance		
Voltage (V)		12
Capacity (Ah)	C5	85
	C20	105
	C100	115
Cycles IEC/EN 60254-1		300
Self discharge/month		5% @RT
Operating temperatures		-20 to 45°C
Packaging (pcs) EU/CNT		36/60

TAB Motion Pasted

85 P

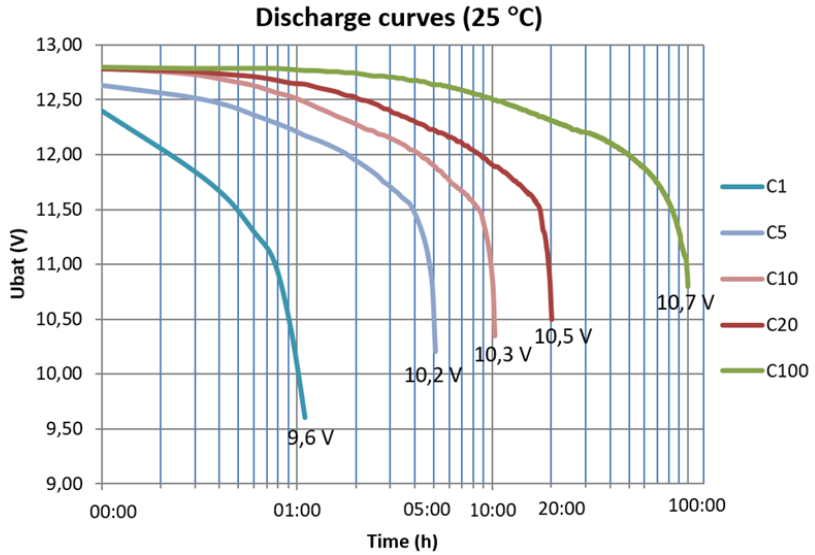

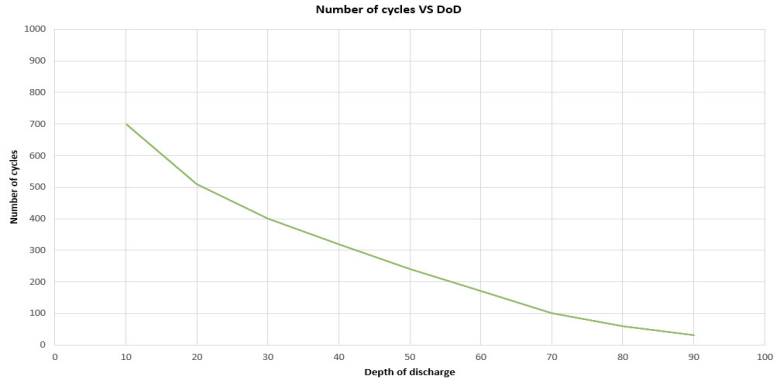


Charging recomendation

For cycling use:


Charging profile	IUIa	
Bulk charge	2,45-2,50	V/cell
Boost charge	2,65-2,75	V/cell
Float charge	2,20-2,30	V/Cell

Voltages apply to room temperature @25°C. When the temperature is different, a voltage compensation of 5mV/°C/cell must be taken into account

Terminals:



Layout:



CALL CENTER
Tels.: 98 514 78 10 | 98 514 97 04
Fax: 98 538 17 19

www.daisa.es | pedidos@daisa.es

P. I. Mora Garay, C/ Isaac Peral, 55 33211 GIJÓN
Pocomaco - Parcela, G-4 - 15190 LA CORUÑA

Oficinas Comerciales
Pso. de la Castellana, 166 bajo 3 - 28046 MADRID

Centro Logístico
P. Miralcampo, C/ del Plástico, 4
19200 Azuqueca de Henares GUADALAJARA

Almacén y Oficinas Islas Canarias
P.I Güinar, Manzana XV, nave 5
38508 Güimar STA. CRUZ DE TENERIFE