

EC23BX3_1 185 Ah

According to EN 50342



EFB series

HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C²⁰:	185 Ah
Cold cranking current:	1100 A [EN]
Cold cranking current:	660 A [DIN]

Mechanical specification

Dimensional group:	B
ETN reference:	685 002 110 EFB
DIN reference:	68502
Dimensions^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Blue

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3	E3

Weight^B

Battery weight in kg:	33.20
Acid weight in kg:	12.20
Total battery weight in kg:	45.40

Layout

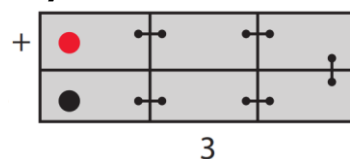

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.